



📍 Add: R1103, Xintian Building, No. 5055 Songbai Road, Guangming District, Shenzhen, China

📍 Factroy: No. 36 Sanlin Industry Zone, Xiaxi Pingzhou, Nanhai District, Foshan City, China

Web: www.williamarchi.com Email: info@williamarchi.com Tel: 0086 0755-23696342

FLOOR

Solid wood

Laminate

Engineered

Bamboo flooring

WPC flooring

SPC flooring

WilliamArchi Limited
williamarchi.com

COMPANY

Founded in 2005, WilliamArchi is a professional manufacturer engaging in enviroment-friendly flooring, we'd like to create a win-win situation and build a long-termed cooperation with you.

After a decade's development, we already become a company with rich experience of different projects, our own factory, design, sophisticated technology and proven quality, qc and shipping, will ensure you an easy and happy international purchasement experience.

WilliamArchi成立于2005年，是一家专业生产环保地板的厂家，我们愿与您共创双赢，建立长期合作关系。经过十年的发展，我们已经成为一个拥有丰富的项目经验的公司，我们有自己的工厂，设计，先进的技术和证明的质量，qc和发货，将确保您轻松愉快的国际采购经验。



DIRECTORY




Soild wood flooring 实木地板	01-16
Three-layer soild wood flooring 三层实木地板	17-24
Multilayer composite flooring 多层复合地板	25-30
Laminate flooring 强化地板	31-38
Interior bamboo floor 室内竹地板	39-40
Outdoor bamboo floor 室外竹地板	41-44
WPC flooring 木塑地板	45-48
WPC railing WPC护栏	49-52
WPC wall panel 木塑墙板	53-56
PVC/SPC flooring PVC/SPC地板	57-60



Real wood floor is the ground adornment material that forms after natural lumber classics drying, processing. Also known as the original wood floor, is directly processed into a solid wood floor. It has the advantages of sound insulation and heat insulation, humidity regulation, warm in winter and cool in summer, and environmental protection.

Common specifications:
Length: 460mm, 610mm, 760mm, 910mm, 1200mm, 1500mm
Width: 55-- 85mm
Skinny: 90-98 mm
BiaoBan: 120-135 mm
Wide version: More than 150 mm
Ultra wide version thickness: with 18mm mainly

Big leaf red sandalwood black walnut floor
大叶红檀黑胡桃色地板

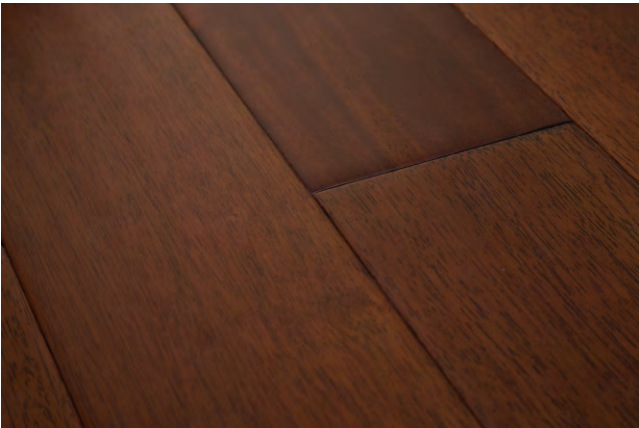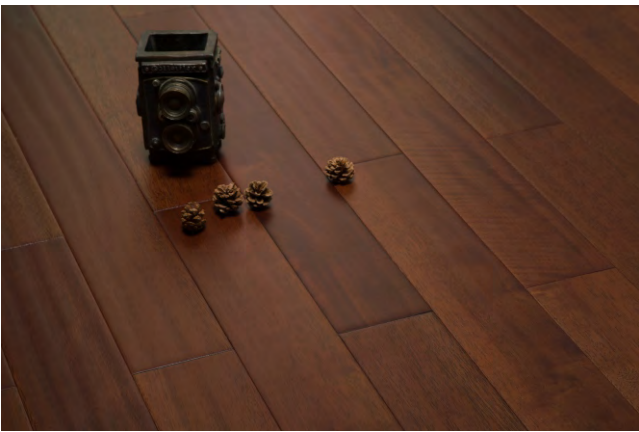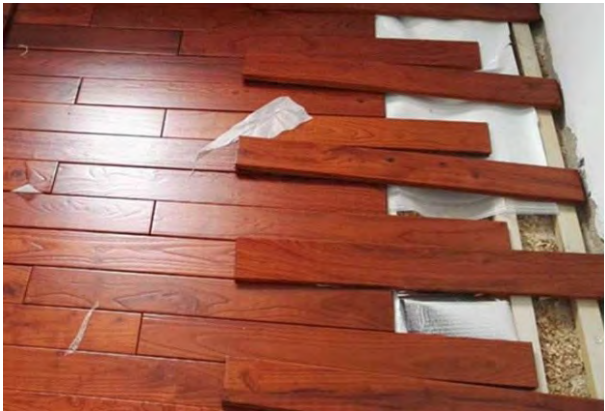

01




Soild Wood Flooring



实木地板



Teak is moisture-proof, insect-proof, ant-proof, and especially resistant to decay. Good stability, its fragrance is beneficial to the brain nervous system of middle aged and old people,1 oily spot will fade gradually with the action of sunshine, color is more beautiful.

Large leaf red sandalwood teak color
大叶红檀柚木色

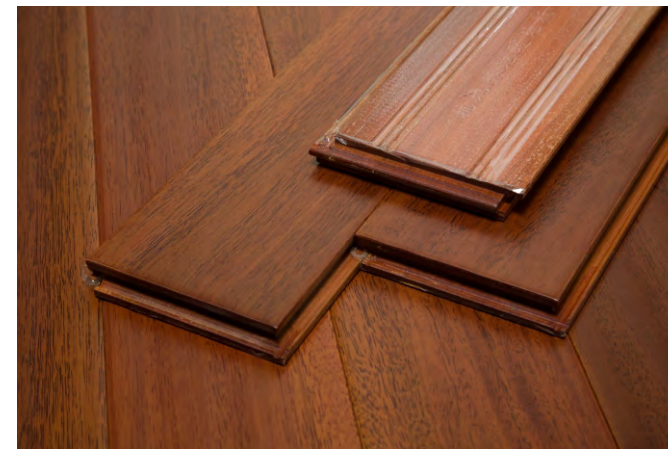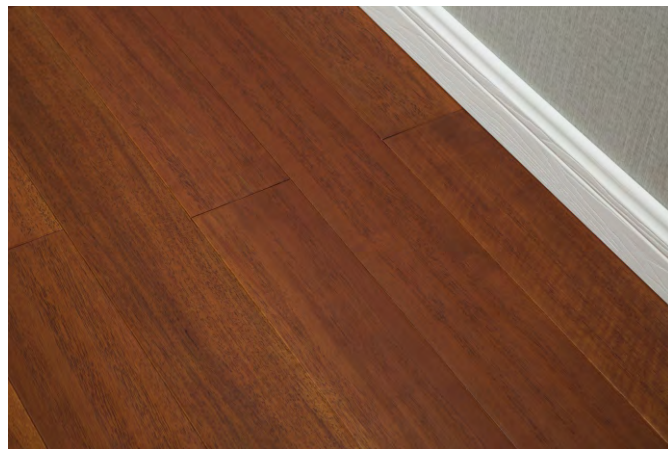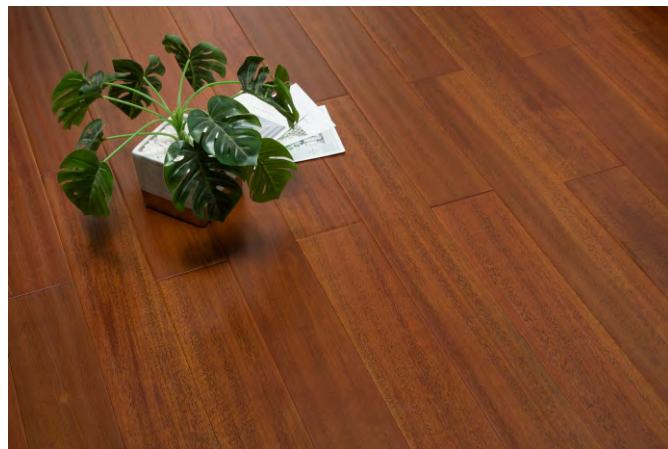

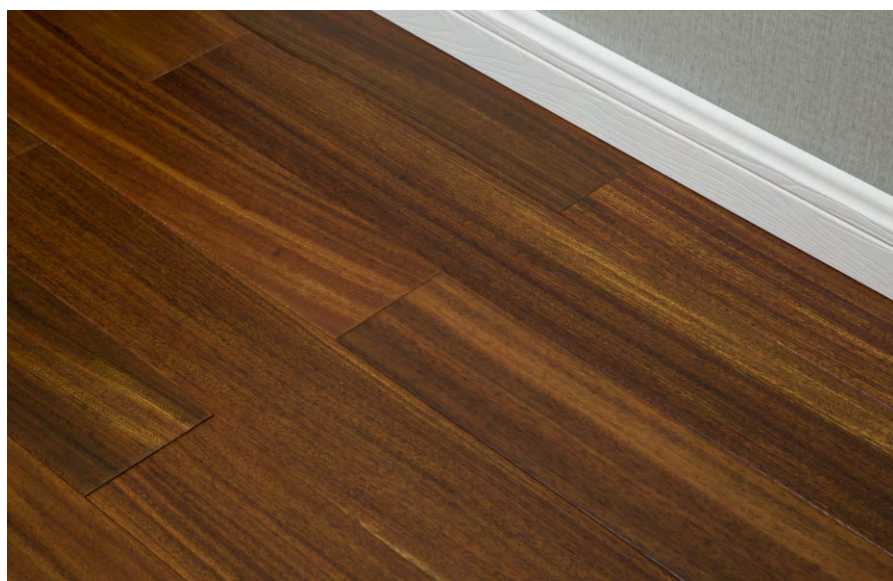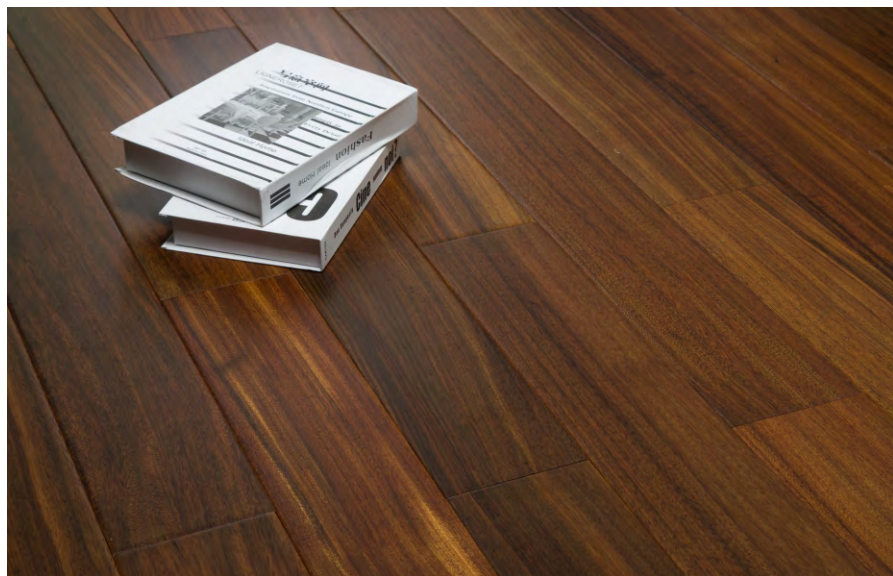

African rosewood
非洲紫檀



格丽斯

What real wood floor uses is natural lumber, do not contain formaldehyde so, did not harm to human body, because this has certain environmental protection sex, the flexibility of laid good real wood floor is very good, very comfortable, and also can rise in winter adjust temperature to make belong to, won't feel icy cold.



Red oak gray
红橡灰

Wood is natural, its tree ring grain often gives a person a kind to return to nature, return the feeling of unsophisticated return true, no matter simple sense and aesthetic feeling develop a school of one's own, this is artificial floor anyhow the quality that cannot achieve.









walnut gray
胡桃灰



Solid wood parquet

实木拼花

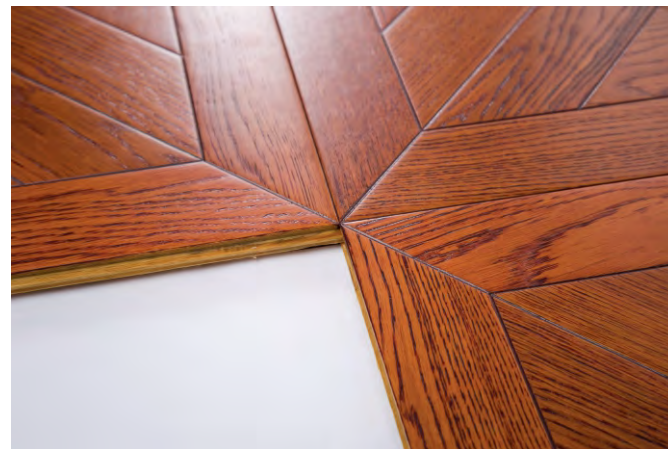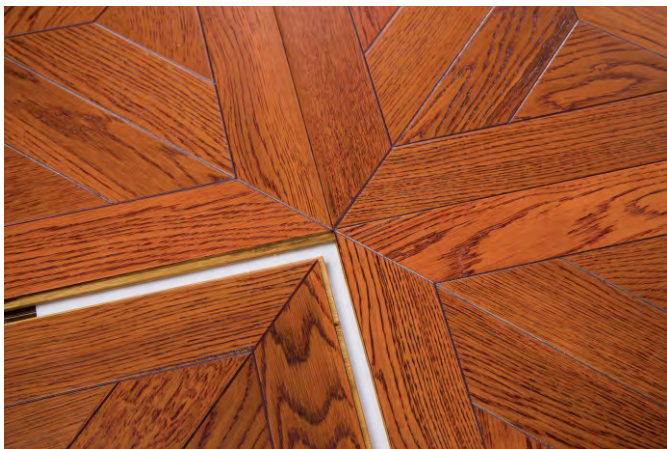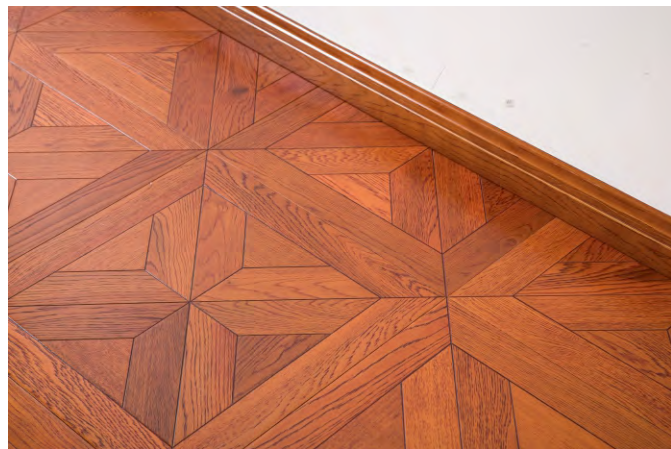

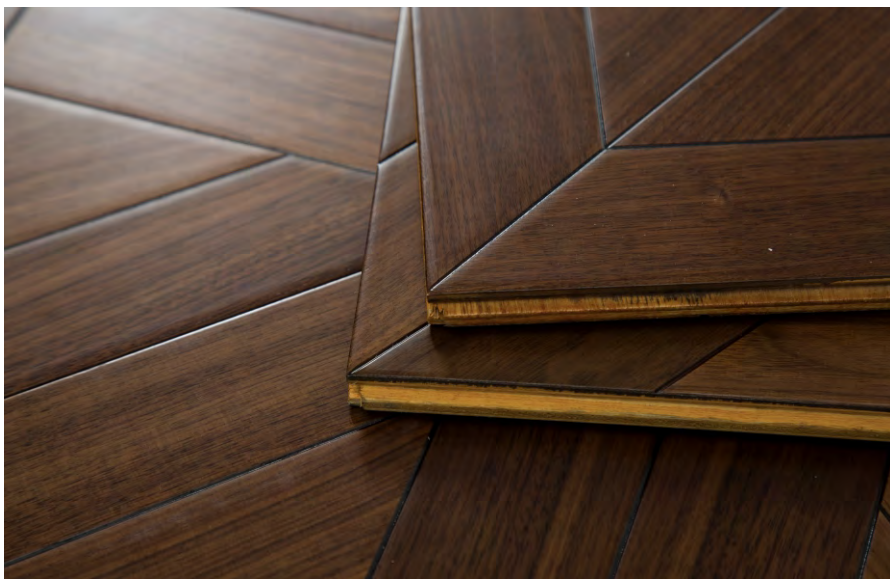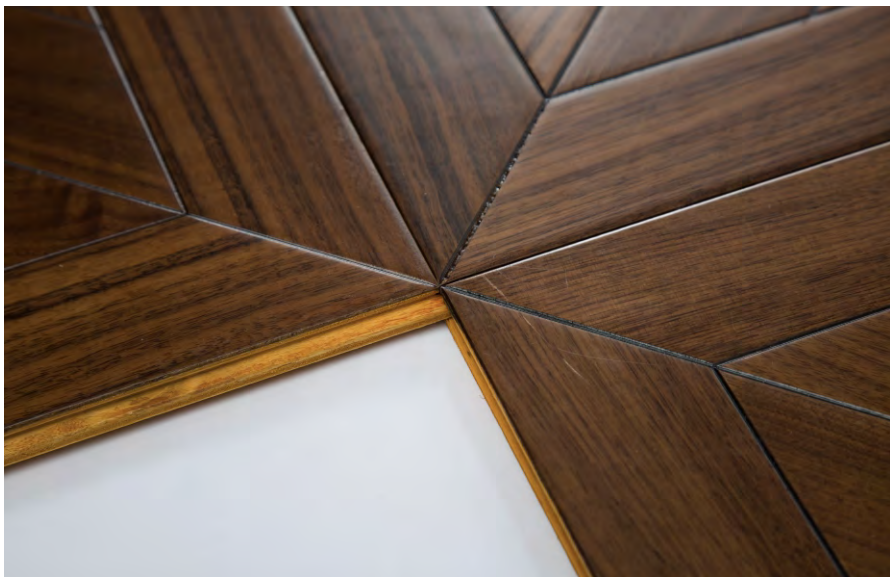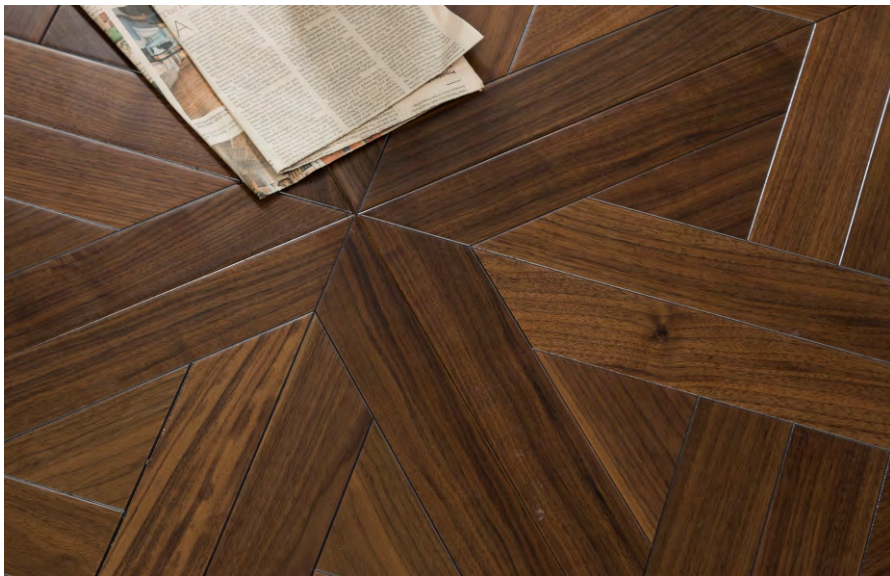






The three-layer structure solid wood compound floor refers to the tone-and-groove floor made with the solid wood jointing board or the single board as the surface layer, the solid wood strip as the core layer and the veneer as the bottom layer.



Dimensions: 12mm, 15mm, 18mm
The length is usually 900-2200 mm;
The width is 120-200 mm
The commonly used thickness is 15mm;
The commonly used sizes for families are 1020*12315mm, 1200*150*15mm, 1802*150*15mm.
Surface thickness 0.2-2mm.

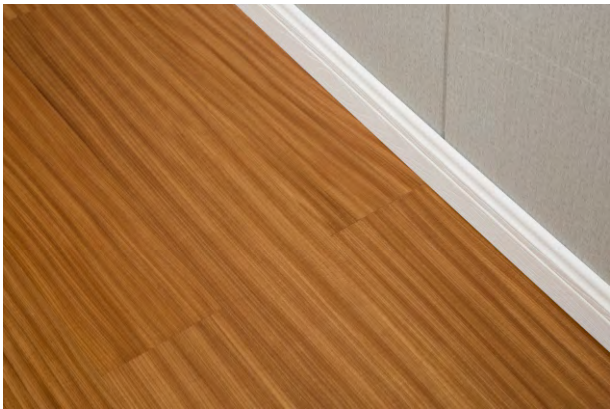




02

Three-layer Wood Flooring

三层实木地板

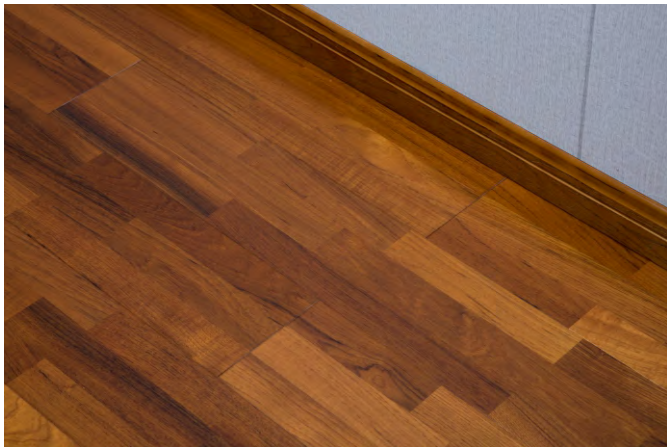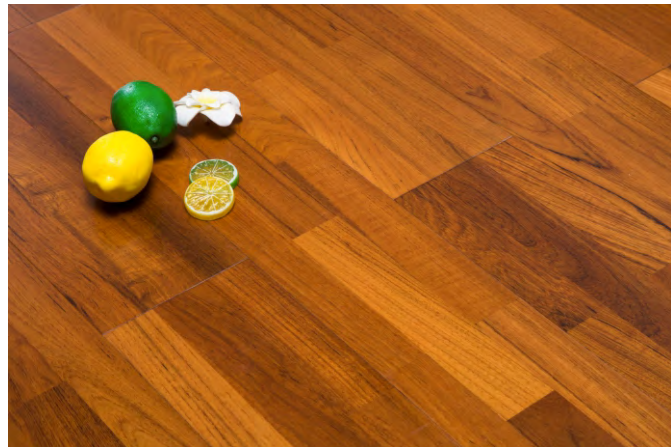




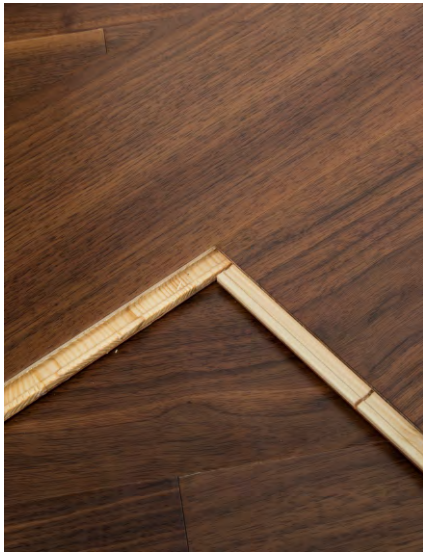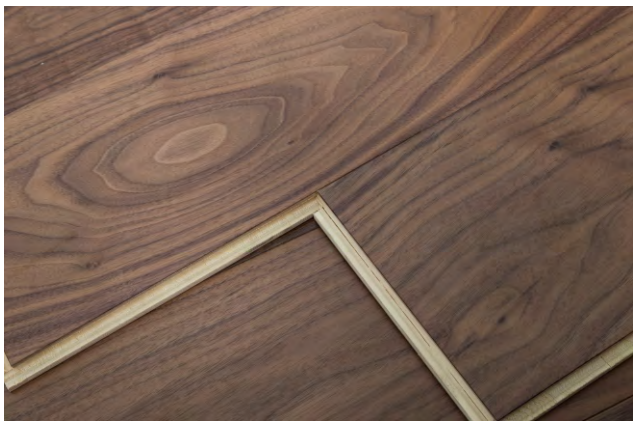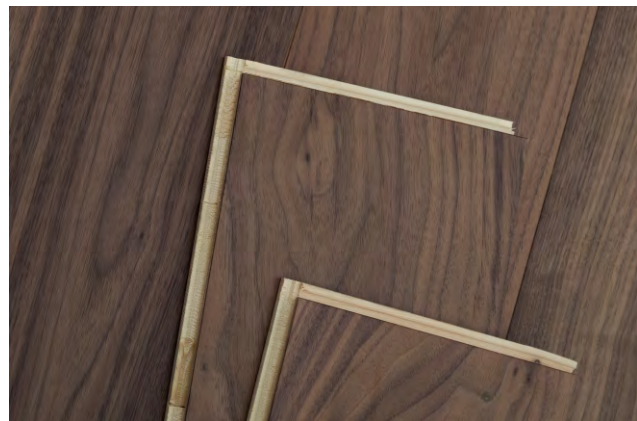



Multilayer composite floor with multilayer plywood as the base material, the surface layer for hardwood veneer veneer or planed veneer, hot pressed with glue.

Dimensions: 12mm, 15mm, 18mm
The length is usually 900-2200 mm;
The width is 120-200 mm
The commonly used thickness is 15mm;
The commonly used sizes for families are 1020*12315mm, 1200*150*15mm, 1802*150*15mm.
Surface thickness 0.2-2mm.

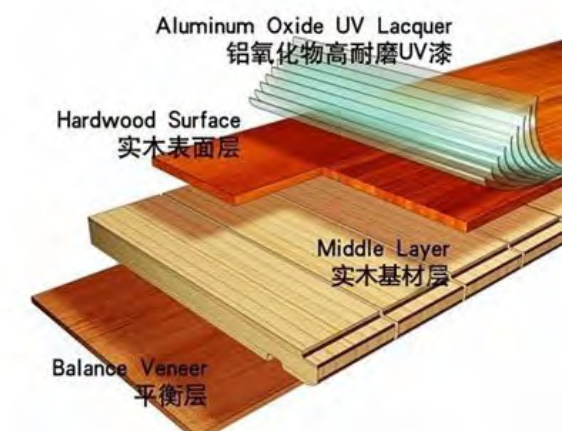

03

Multilayer Composite floor


多层复合实木








Aggrandizement floor is to be composed by compound of 4 material commonly, namely wear-resisting layer, adornment layer, layer of material of high density foundation, balance (moistureproof) layer. Laminate flooring also known as impregnated paper laminate wood flooring, laminate flooring.


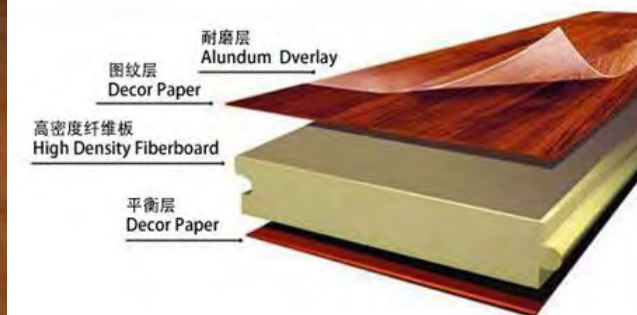







Common size: 1200/1300*191-195*8/12mm




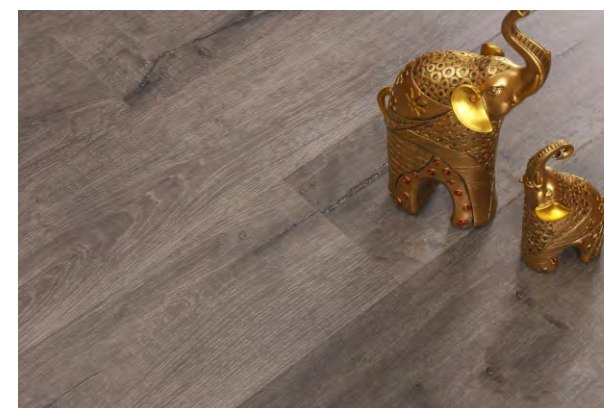


04 Laminate Flooring

强化地板

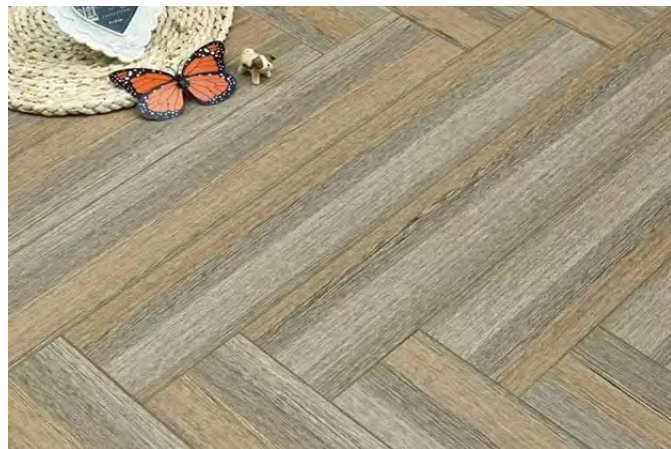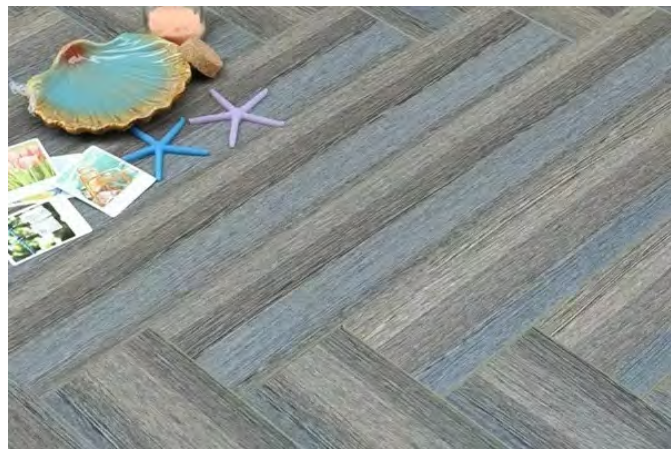

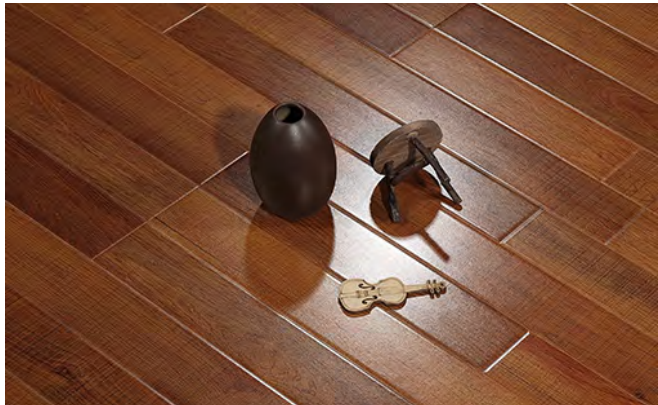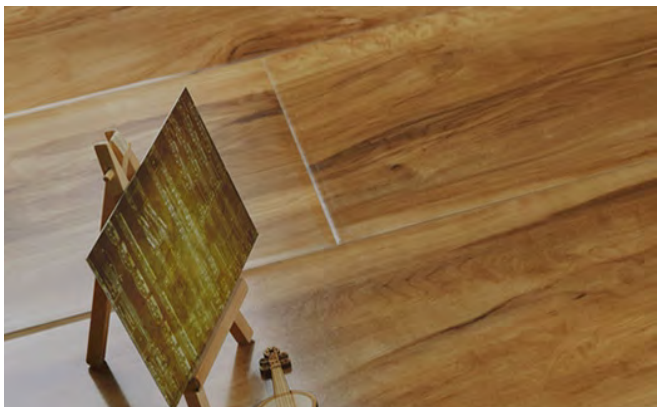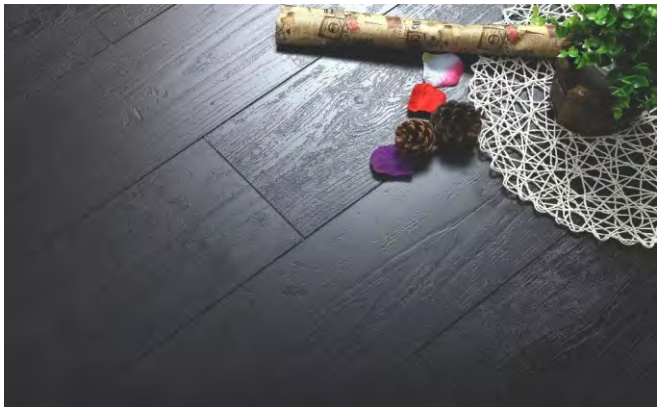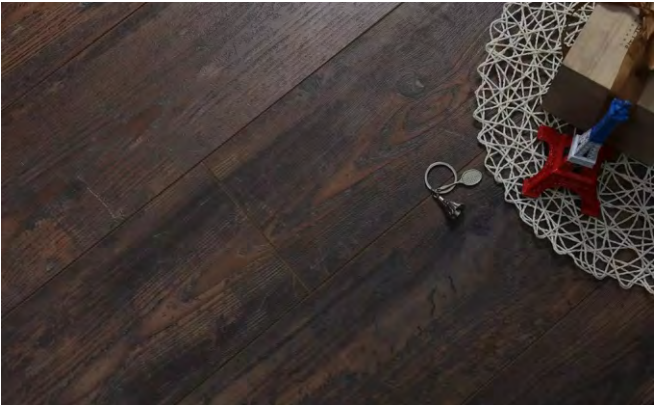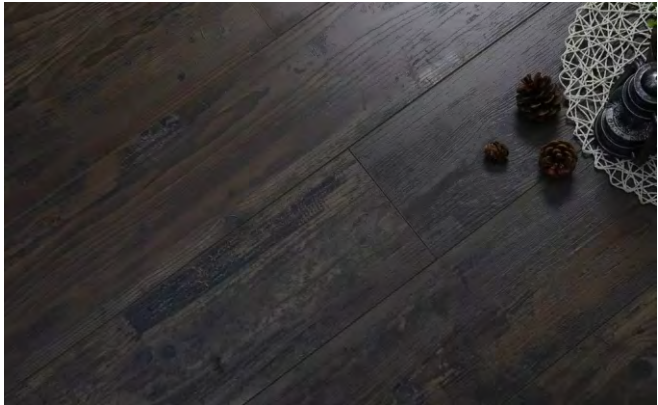

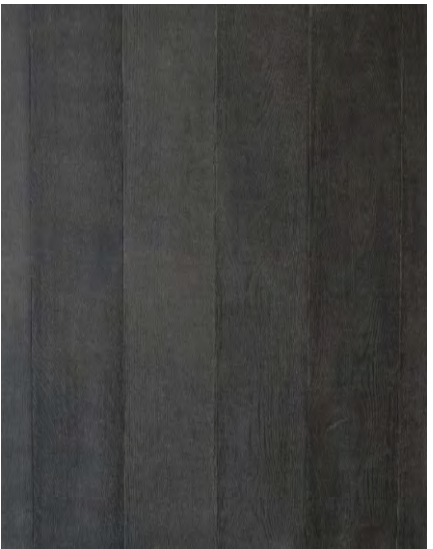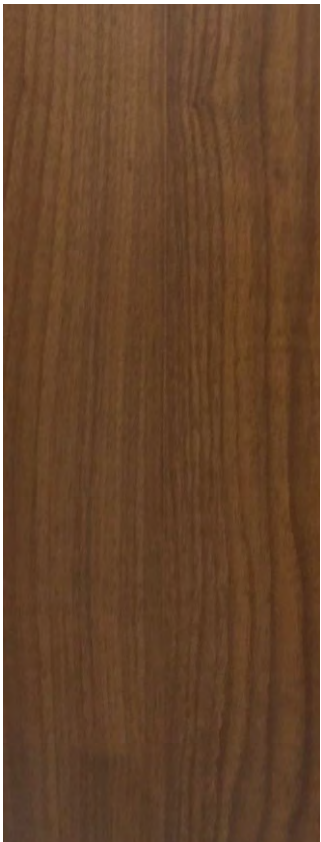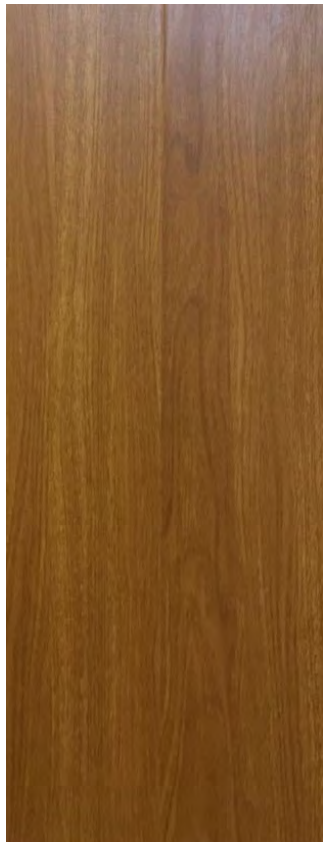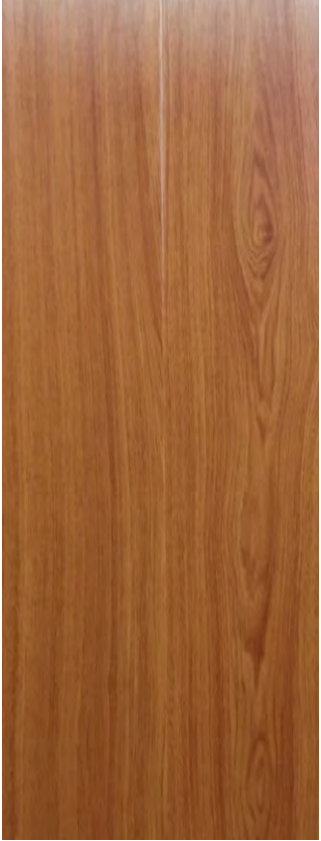



Bamboo floor is a kind of new building adornment material, it is raw material with natural high-quality bamboo, pass 20 working procedure, take off bamboo original pulp juice, pass high temperature and high pressure to go all out pressure, pass again multi-layer paint, infrared ray is dried finally and become.


Common size: 1020*130*17, 1020*130*15mm, 1000*126*17mm, 915/1850*125*14mm, 920/1850*132*14mm



05


Interior Bamboo Floor

室内竹地板

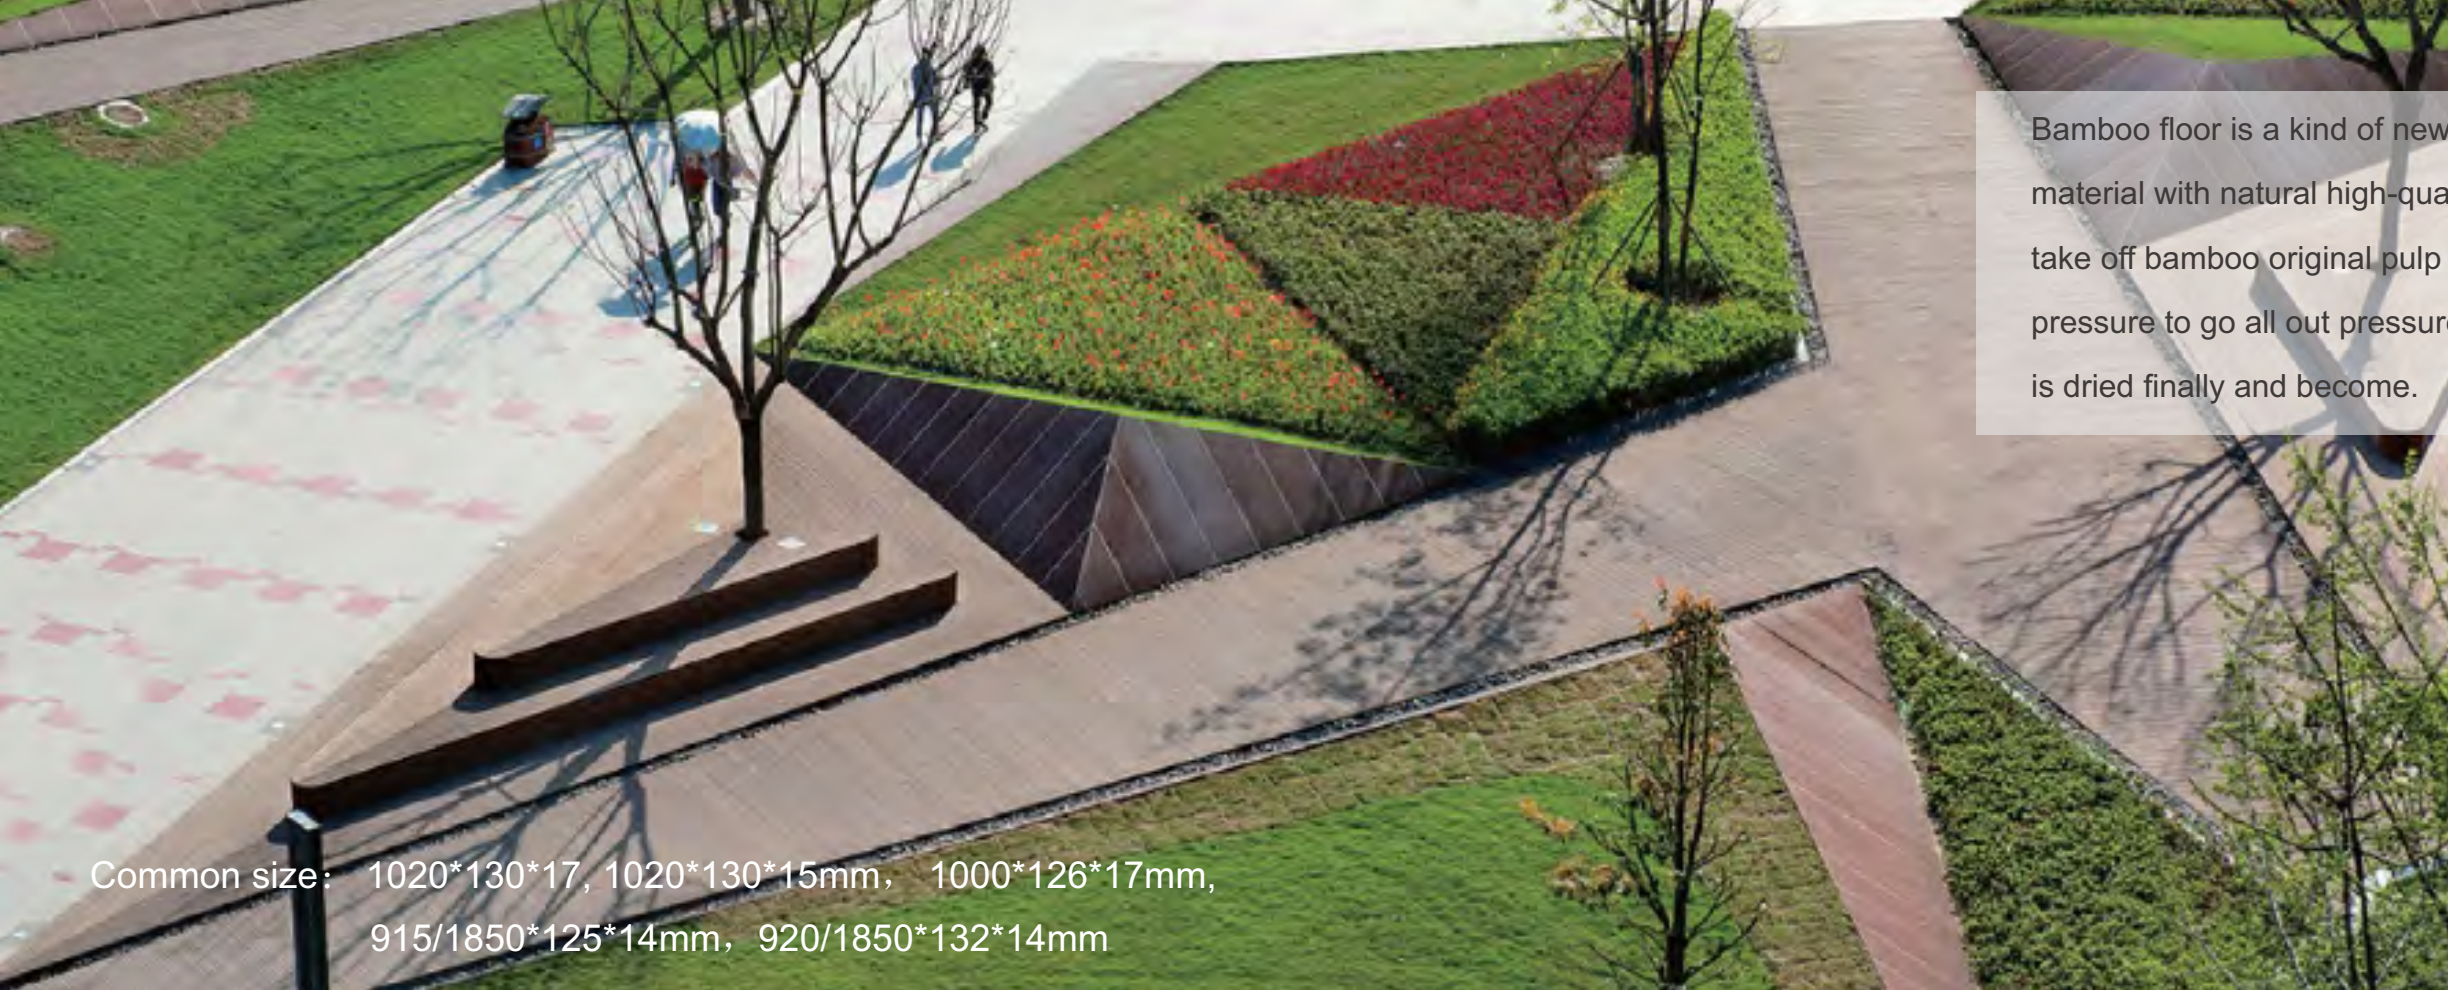


Bamboo floor is a kind of new building adornment material, it is raw material with natural high-quality bamboo, pass 20 working procedure, take off bamboo original pulp juice, pass high temperature and high pressure to go all out pressure, pass again multi-layer paint, infrared ray is dried finally and become.


Common size: 1020*130*17, 1020*130*15mm, 1000*126*17mm, 915/1850*125*14mm, 920/1850*132*14mm

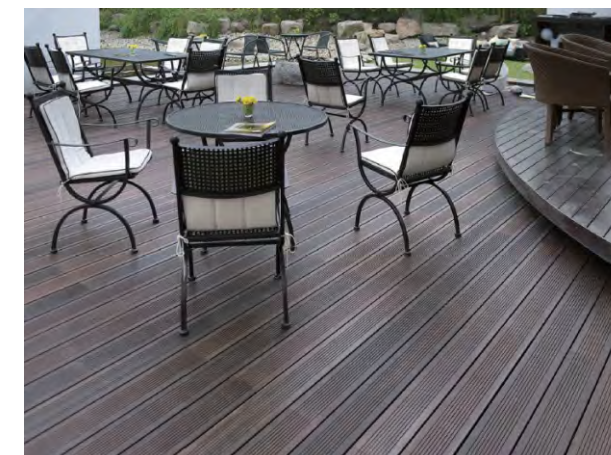

06 Outdoor Bamboo Floor

室外竹地板

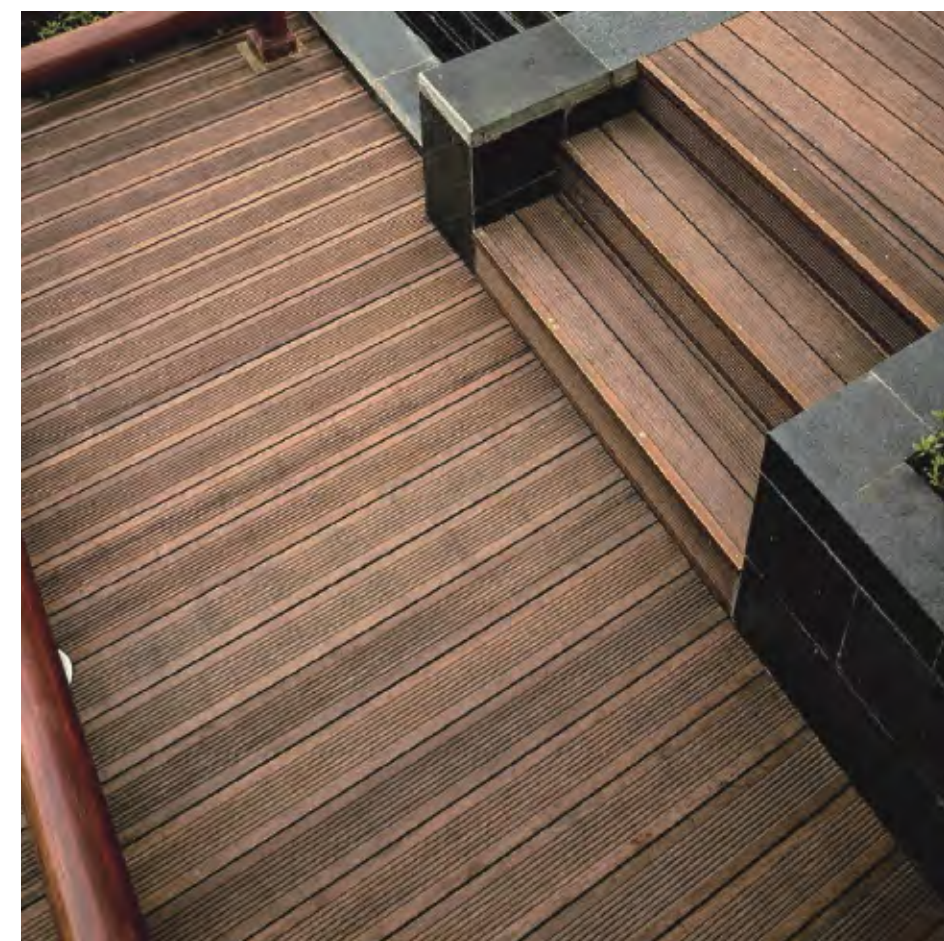


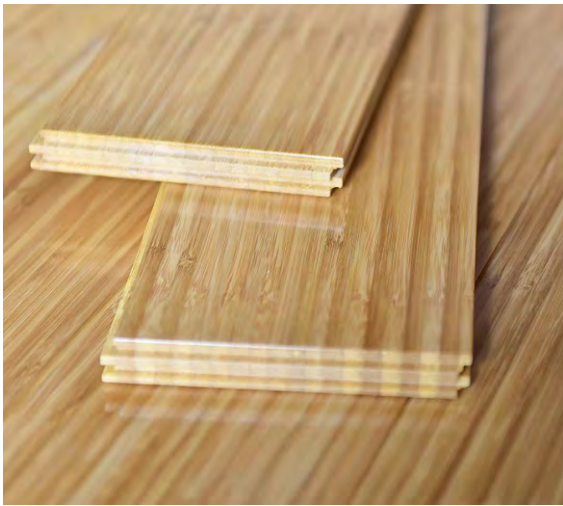



Wood- Plastic Composites, WPC Refers to the use of polyethylene, polypropylene and POLYvinyl chloride, and then by extrusion, molding, injection molding and other plastic processing technology, the production of the plate or profile. It is called extruded WPC, which is a panel formed by hot extrusion after mixing plastic and wood powder at a certain proportion layer paint, infrared ray is dried finally and become.





Common size:157*22、150*25、200*25、200*24、140*25、200*25
Length: 2.2m

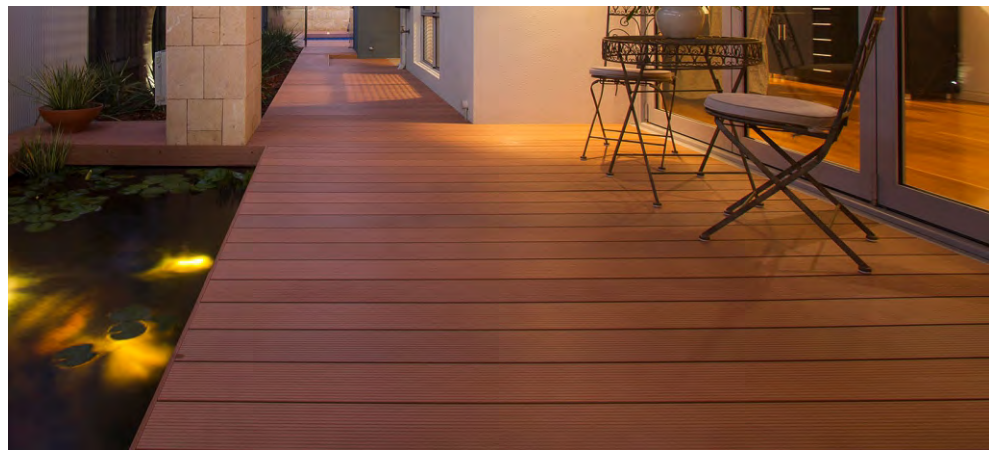

07 WPC Flooring

木 塑 地 板




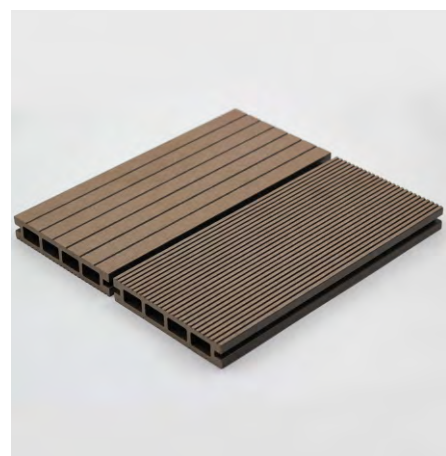
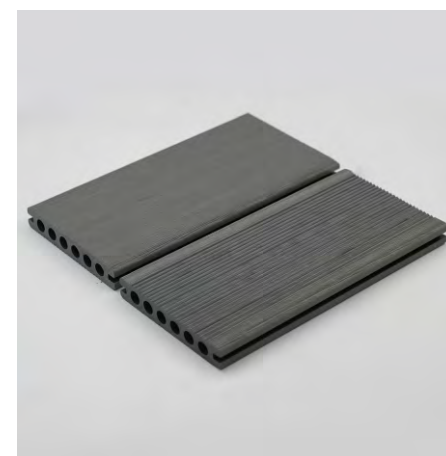
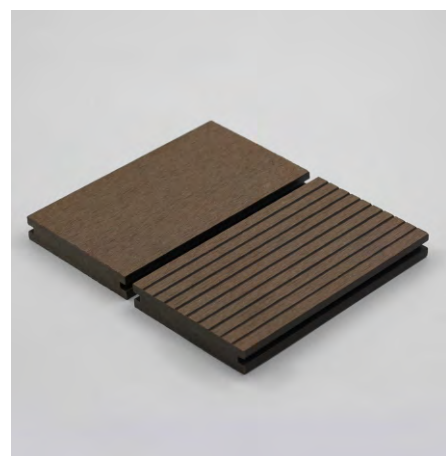
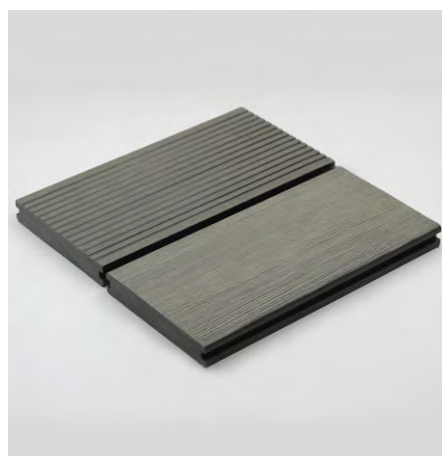




08 WPC RAILLIANG

w p c护栏

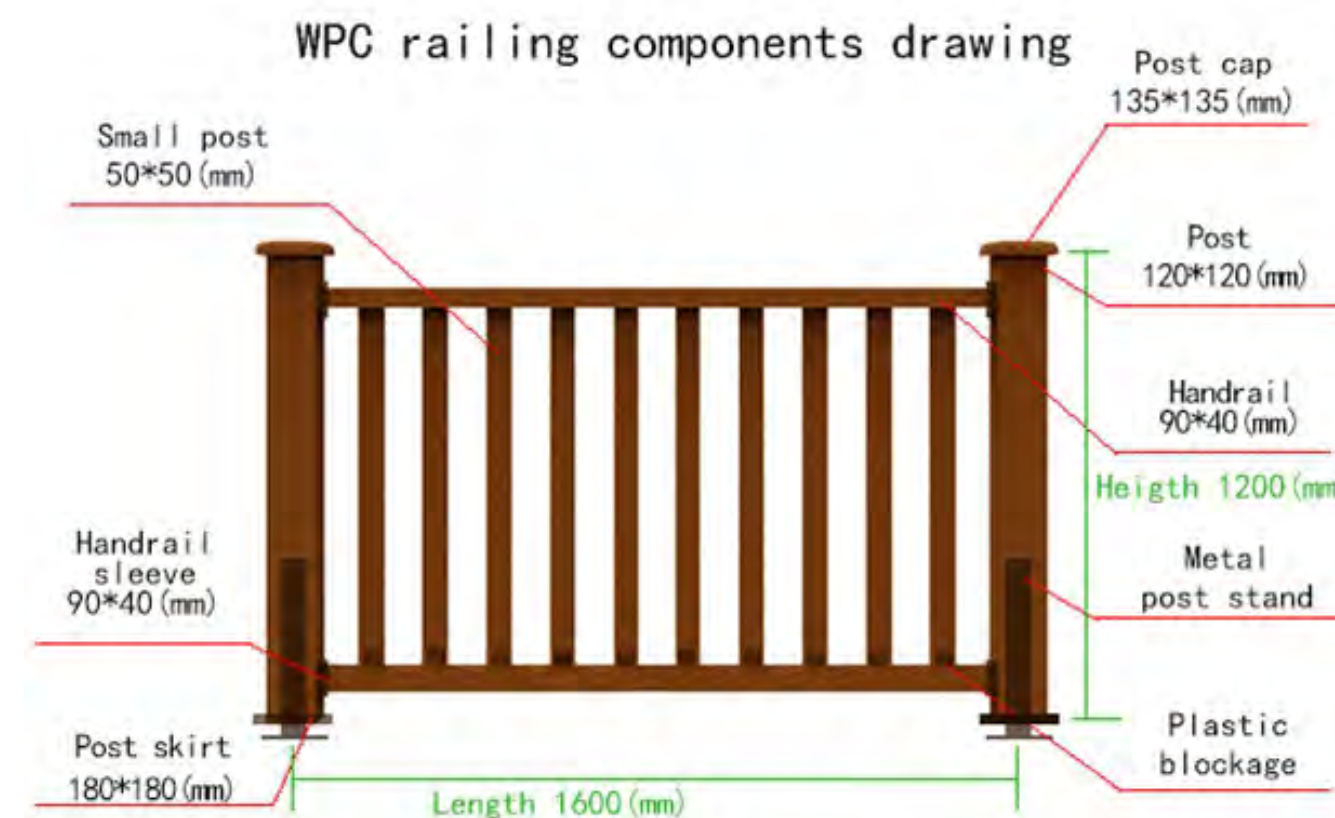


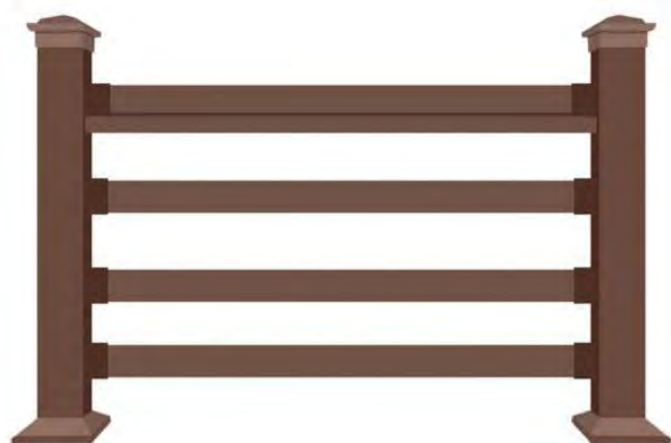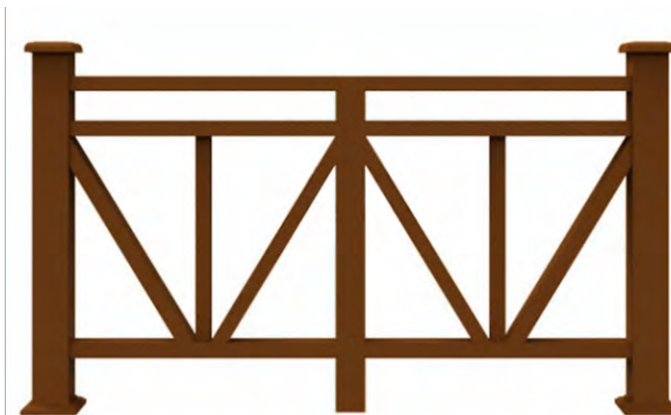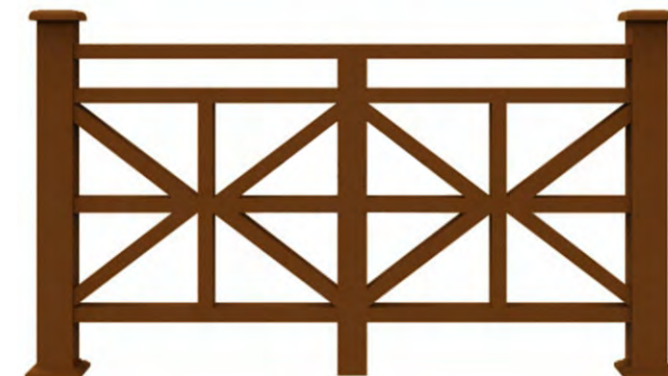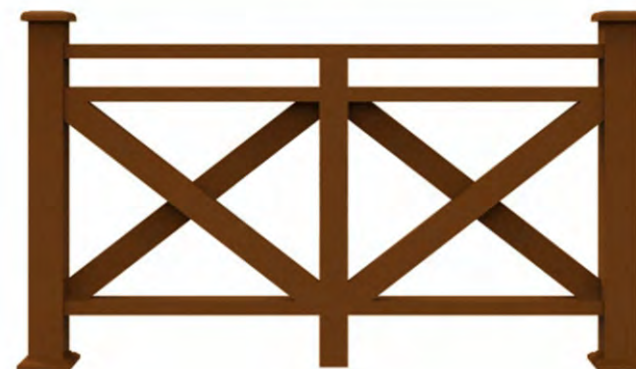



Wood- Plastic Composites, WPC Refers to the use of polyethylene, polypropylene and POLYvinyl chloride, and then by extrusion, molding, injection molding and other plastic processing technology, the production of the plate or profile.It is called extruded WPC, which is a panel formed by hot extrusion after mixing plastic and wood powder at a certain proportionlayer paint, infrared ray is dried finally and become.


Common size:157*22、150*25、200*25、200*24、140*25、200*25
Length: 2.2m


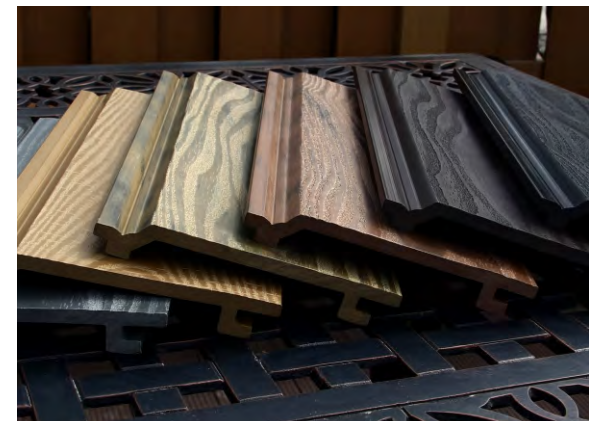


09

WPC Wall Panel

木塑墙板

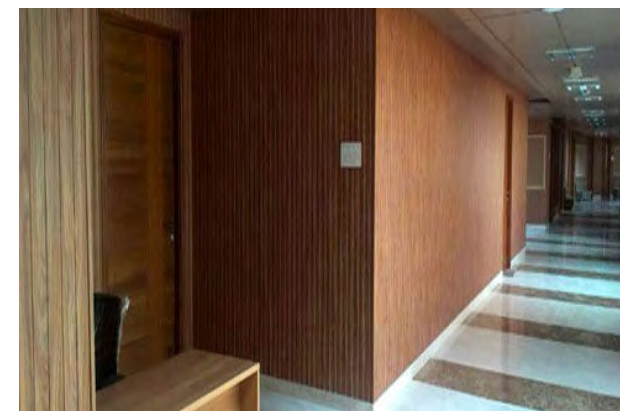

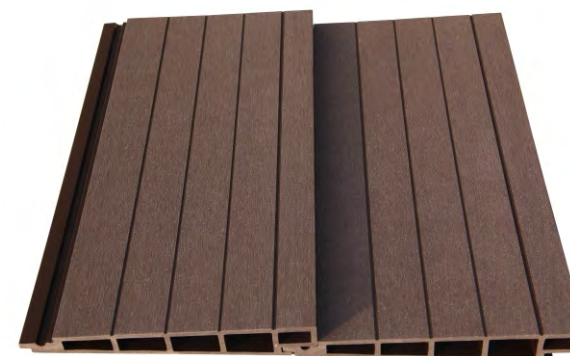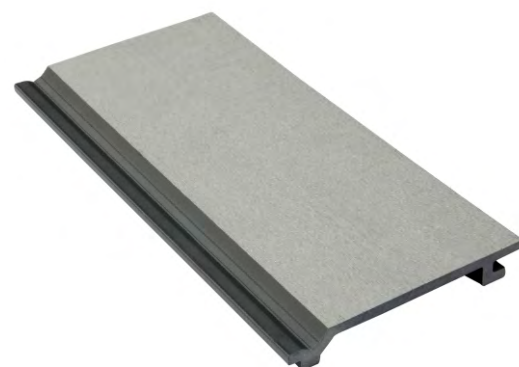



PVC floor refers to the floor that uses polyvinyl chloride material to produce. It is specific to polyvinyl chloride and its copolymerization resin as the main raw materials, add filler, plasticizer, stabilizer, colorant and other auxiliary materials, in the flake continuous substrate, after coating process or by rolling, extrusion or extrusion process production.

Common size: 1220mm*180mm, 935mm*150mm, 1210mm*178mm
Conventional thickness: 2.0mm, 3.5mm, 4.0mm, 4.2mm, 5.0mm, 6.0mm



10 PVC/SPC Flooring

PVC/SPC 地板

